

FS73/FS74 Series Medical Foot Switches


Features

- Robust glass fiber reinforced plastic housing
- Available in single momentary action or rocker (left and right) styles

Specifications

Operating Frequency	60 ops/min
Insulation Resistance	>100MW@500V DC
Contact Resistance	<25mΩ (initial)
Rated Current/Voltage	10A/15A 1/2HP 250VAC
Dielectric Strength	1000VAC for 1 min between current carrying parts 2500VAC for 1 min between non-current carrying parts
Service Life	1 x10 ⁶ (operations)
Operating Temperature	-30~+80°C (-22~176°F)
Degree of Protection	IPX8/NEMA 4,4X,6,6P (add -w suffix)


Selection Guide:

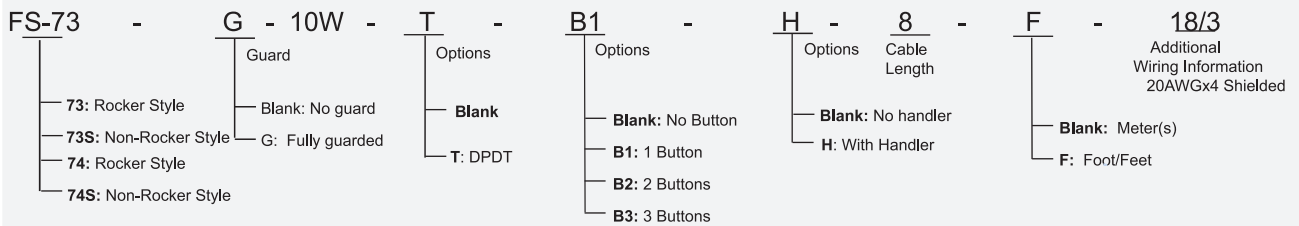

Dimensions:

* Offer custom cable and connector according to customer requirements.

- FS-73S-10-W-2-20/4S (20AWGx4, shielded, 2 meters, 3x 1NO, cable diameter 7.0mm)
- FS-73S-10-W-2-22/5S (22AWGx5, shielded, 2 meters, 3x 1NO, cable diameter 5.6mm)
- FS-73S-10-W-B1-2-22/5S (22AWGx5, shielded, 2 meters, 4x 1NO, cable diameter 5.6mm)
- FS-73-10-W-26/7 (26AWGx7, PUR, coiled, 6x 1NO, cable diameter 5.3mm)

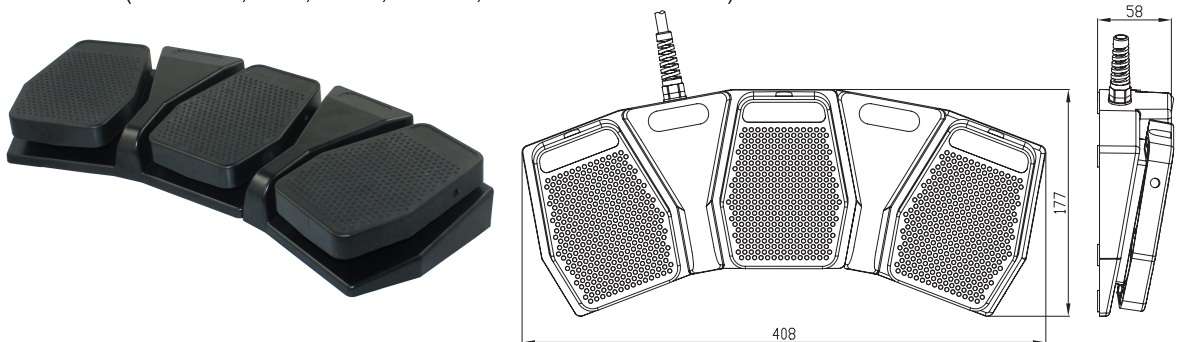

- FS-74S-10-W-2-22/5S (22AWGx5, shielded, 2 meters, 4x 1NO, cable diameter 5.6mm)
- FS-74S-10-W-B1-26/7 (26AWGx7, PUR, coiled, 5x 1NO, cable diameter 5.3mm)
- FS-74S-10-W-B2-26/7 (26AWGx7, PUR, coiled, 6x 1NO, cable diameter 5.3mm)

