


SLS-25 Series (Square Type) Inductive Proximity Switches

Housing Type: Plastic
 Operating Temperature: -25**70*
 protection: Reverse Polarity Protection +
 Short circuit and overload protection
 LED indicator: Red output energized,360 visibility
 Degree of Protection: IP67 (EN 60529)
 Applicable Standard: GB/T14048.10 EN 60947-5-2
 Certification: UL Certification: E310408
 CCC Certification: 20080103050268320



■ Dimensions (mm)

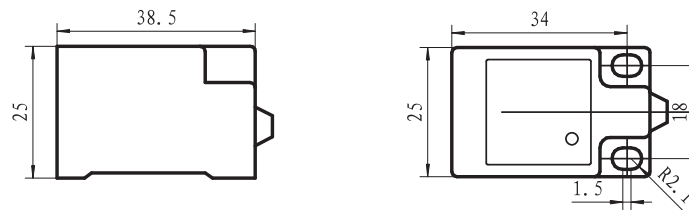

■ Specifications

Type	Model Number(s)	Sn Sensing Rangenmm	Type		Rated Voltage			Output					
			Shielded	Unshielded	10-30VDC	10-36VDC	20-250VAC	Normal Open	Normal Close	NPN	PNP	Load Current (Max)mA	Switching Frequency Hz
2-Wire DC Shielded	SLS-25-10DE0	10	*		*			*				50	350
	SLS-25-10DEC	10	*		*				*			50	350
2-Wire DC Unshielded	SLS-25-15DNO	15		*	*			*				50	300
	SLS-25-15DNC	15		*	*				*			50	300
3-Wire DC Shielded	SLS-25-10DEON	10	*			*		*		*		200	350
	SLS-25-10DEOP	10	*			*		*		*		200	350
	SLS-25-10DECN	10	*			*			*	*		200	350
	SLS-25-10DECP	10	*			*			*	*		200	350
3-Wire DC Unshielded	SLS-25-15DNON	15		*	*			*		*		200	300
	SLS-25-15DNOP	15		*	*			*		*		200	300
	SLS-25-15DNCN	15		*	*				*	*		200	300
	SLS-25-15DNCP	15		*	*				*	*		200	300
2-Wire AC Shielded	SLS-25-10AEO	10	*				*	*				350	25
	SLS-25-10AEC	10	*				*	*				350	25
2-Wire AC Unshielded	SLS-25-15ANO	15		*		*	*	*				350	25
	SLS-25-15ANC	15		*		*	*	*				350	25